


NRL709HD 磁保持继电器/Magnetic Latching Relay

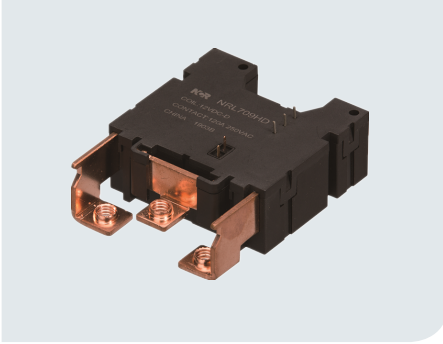

◆ 特点 Characteristic

- > 体积小, 120A触点切换能力;
- > 线圈功耗小、温升极低;
- > 触点接触电阻小, 电接触稳定性好;
- > 抗冲击、抗振动能力强;
- > 外形尺寸: 58.0×52.0×23.3mm;
- > Small size, 120A switching capability.
- > Low coil consumption, ultra-low temperature rise.
- > Low contact resistance.
- > Strong anti-shock and anti-vibration capability.
- > Outline size: 58.0×52.0×23.3mm.

◆ 订货标记 Ordering Information

NRL	709HD	-	12	-	S	-	120	①	磁保持继电器代号 Latching Relay	
①	②	③	④	⑤					②	产品型号 Part Number
									③	线圈电压 Coil Voltage
									④	D 表示双线圈, S 表示单线圈 D= Double Coil; S= Single Coil
									⑤	120=120A

◆ 性能 Characteristics

绝缘电阻 Insulation resistance		1000MΩ (500VDC)
介质耐压 Dielectric Strength	触点与线圈间 Between Coil & Contacts	4000VAC 1min
	断开触点间 Between Open Contacts	2500VAC 1 min
闭合时间 Operate Time		20msec. Max.
断开时间 Release Time		20msec. Max.
抗冲击 Shock resistance	稳定性 Functional	98m/S ² (10g)
	强度 Destructive	980m/S ² (100g)
振动 Vibration resistance		10~55Hz 1.5mm
湿度 Humidity		90%RH ,40°C
温度范围 Ambient temperature		-40 ~ +85°C
引出端方式 Termination		快连接式 Fast connection
重量 Unit weight		150g
封装形式 Constrution		防尘罩 Dust protected

NRL709HD 磁保持继电器/Magnetic Latching Relay

◆ 触点参数 Contact Data

触点形式 Contact form	1HD
触点材料 Contact material	AgSnO ₂
接触电阻 Contact resistance	Max: 0.5mΩ
触点负载 Contact Rating	120A 250VAC
最大转换功率 Max. Switching Power	30000VA
机械寿命 Mechanical life	5×10 ⁵
电气寿命 Electrical life	1×10 ⁴

◆ 线圈 Coil

线圈功耗 Coil power	单线圈: 5.0W 双线圈: 10.0W Single coil: 5.0W Double coil: 10.0W
-----------------	--------------------------------------------------------------

◆ 线圈参数 Coil Data

额定电压 (VDC) Rated Voltage	动作电压 (VDC) Pick-up voltage	脉冲宽度 (ms) Pulse Duration	线圈电阻 (Ω) Coil Resistance
单线圈 Single coil			
6	4.5	100Min.	7.2±10%
9	6.8	100Min.	16.2±10%
12	9.0	100Min.	28.8±10%
24	18.0	100Min.	115.2±10%
双线圈 Double coil			
6	4.5	100Min.	2×3.6±10%
9	6.8	100Min.	2×8.1±10%
12	9.0	100Min.	2×14.4±10%
24	18.0	100Min.	2×57.6±10%

备注：如需其它额定电压，可特殊定货。

Note: Special ordering for other coil voltage.

◆ 典型应用 Typical Application

- 1) 主要用于 IC 卡预付费电表，集中抄表系统；
Prepayment Energy Meter; AMR System;
- 2) 也用于复合开关、家电和自动控制装置。
Compound Switch; Automatic Control System.

NRL709HD 磁保持继电器/Magnetic Latching Relay

◆ 尺寸图 Dimensions(mm)/ 接线图 Circuit Diagram

