



Industrial & Electrical Components

Relay Socket


Part No.

PYF08A


PYF11A

PYF14A

PYF08A

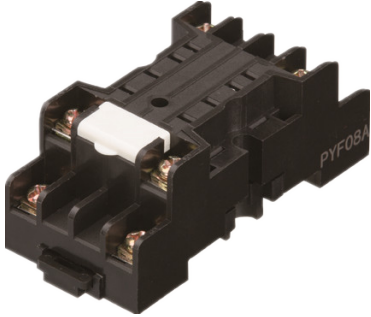


OUTLINE DIMENSIONS

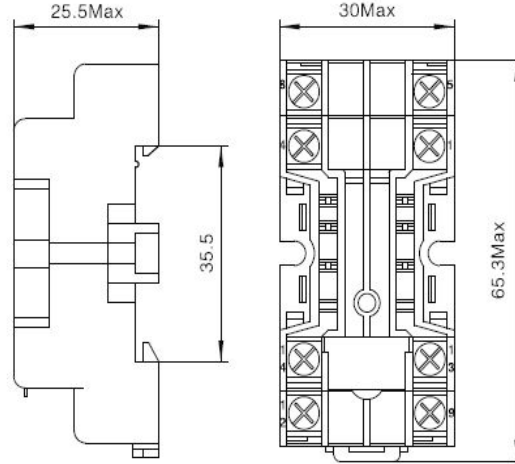


SPECIFICATION

Rated Load	Current	5A
	Voltage	300V
Dielectric Strength		2500V
Ambient Temperature		-40~+75°C
Socket Material		Flame retardance PA66+GF(V1/V0)
Contacts Spring Material		QSn6.5-0.1
Clamp Spring Material		Plastic
Module		No


DIAGRAM

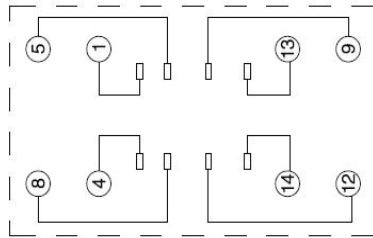

PYF11A

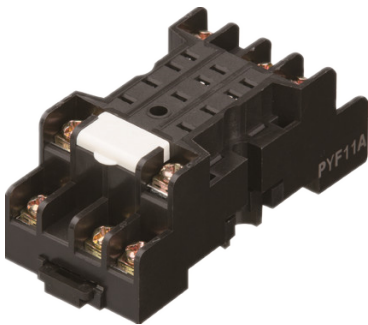


OUTLINE DIMENSIONS

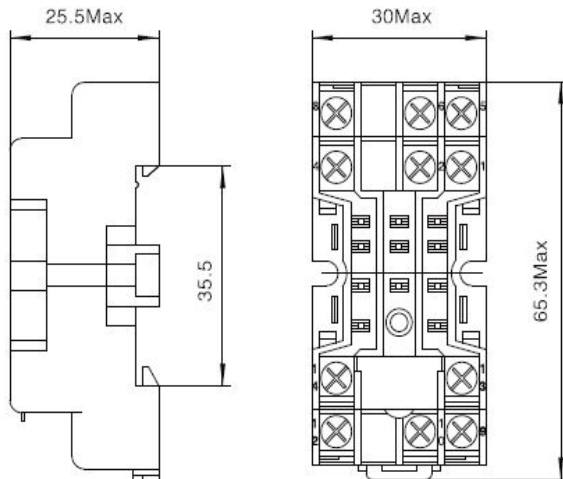


SPECIFICATION

Rated Load	Current	5A
	Voltage	300V
Dielectric Strength		2500V
Ambient Temperature		-40~+75°C
Socket Material		Flame retardance PA66+GF(V1/V0)
Contacts Spring Material		QSn6.5-0.1
Clamp Spring Material		Plastic
Module		No


DIAGRAM

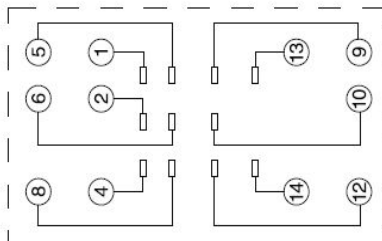

PYF14A

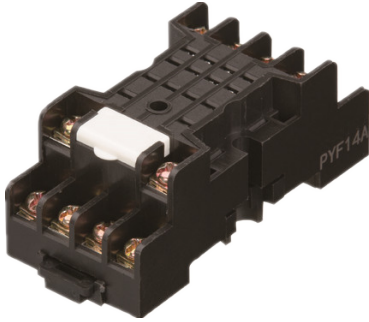

OUTLINE DIMENSIONS

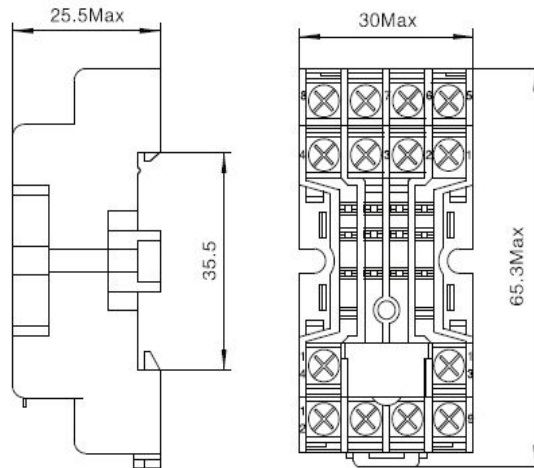

SPECIFICATION

Rated Load	Current	5A
	Voltage	300V
Dielectric Strength	2500V	
Ambient Temperature	-40~+75°C	
Socket Material	Flame retardance PA66+GF(V1/V0)	
Contacts Spring Material	QSn6.5-0.1	
Clamp Spring Material	Plastic	
Module	No	

DIAGRAM

