



Industrial & Electrical Components

Relay Socket


Part No.

PYF08A-B
PYF11A-B
PYF14A-B

PYF08A-B




OUTLINE DIMENSIONS

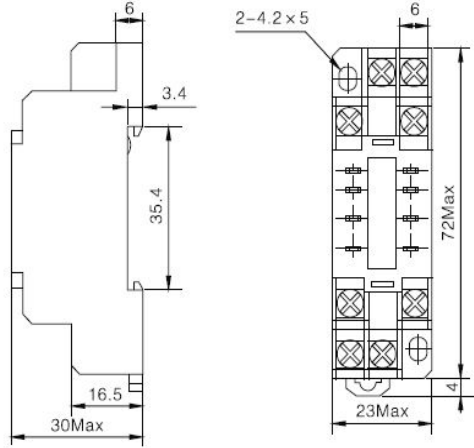


SPECIFICATION

Rated Load	Current	7A
	Voltage	300V
Dielectric Strength		2500V
Screw torque		1.0Nm
Contacts Spring Material		QSn6.5-0.1
Clamp Spring Material		Plastic
Module		No
Matching with		HHC68B-2Z (MY2)

MOUNTING DIMENSIONS




DIAGRAM



PYF11A-B




OUTLINE DIMENSIONS

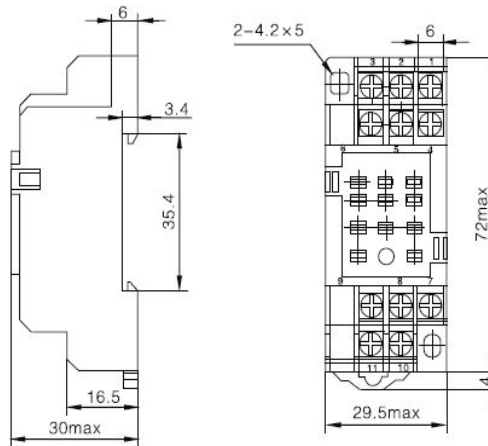


SPECIFICATION

Rated Load	Current	7A
	Voltage	300V
Dielectric Strength		2500V
Screw torque		1.0Nm
Contacts Spring Material		QSn6.5-0.1
Clamp Spring Material		Plastic
Module		No
Matching with		HHC68B-3Z (MY3)

MOUNTING DIMENSIONS




DIAGRAM



PYF14A-B




OUTLINE DIMENSIONS

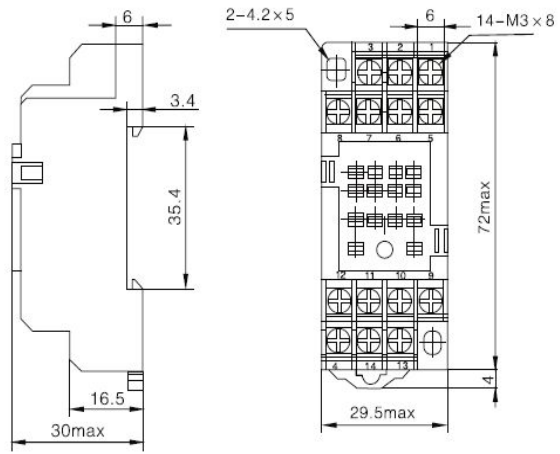

SPECIFICATION

Rated Load	Current	7A
	Voltage	300V
Dielectric Strength		2500V
Screw torque		1.0Nm
Contacts Spring Material		QSn6.5-0.1
Clamp Spring Material		Plastic
Module		No
Matching with		HHC68B-4Z (MY4)

MOUNTING DIMENSIONS



DIAGRAM

