



Industrial & Electrical Components

# Relay Socket


Part No.

14F05-E  
14F08-E

## 14F05-E




## OUTLINE DIMENSIONS

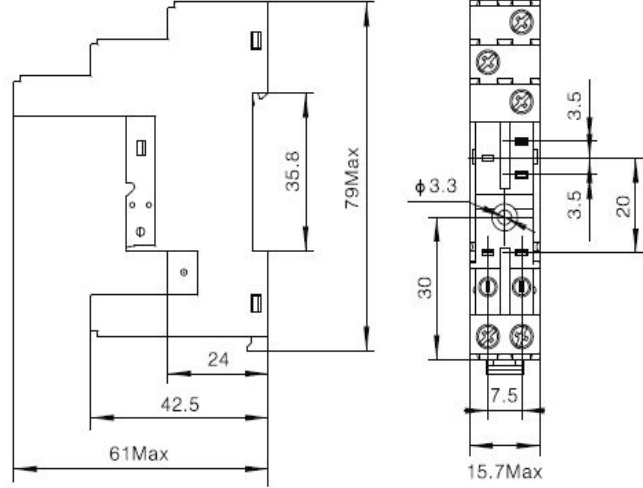

## SPECIFICATION

Rated Load	Current	10A
	Voltage	300V
Dielectric Strength		2500V
Ambient Temperature		-40~+75°C
Socket Material		Flame retardance PA46-S250F6(V0)
Contacts Spring Material		QSn6.5-0.1
Clamp Spring Material		Plastic
Module		Optional


## MOUNTING DIMENSIONS

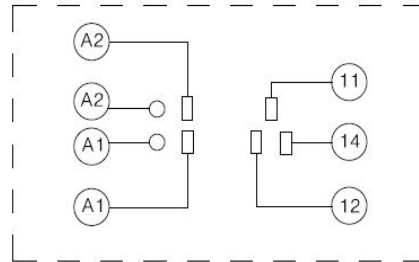

## 14F08-E



## OUTLINE DIMENSIONS

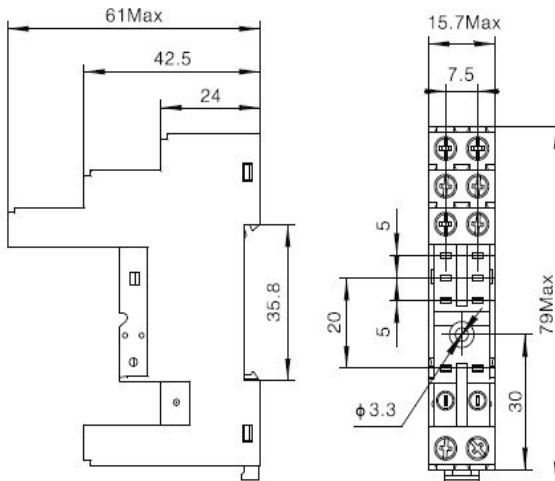

## SPECIFICATION

Rated Load	Current	5A
	Voltage	300V
Dielectric Strength		2500V
Ambient Temperature		-40~+75°C
Socket Material		Flame retardance PA46-S250F6(V0)
Contacts Spring Material		QSn6.5-0.1
Clamp Spring Material		Plastic
Module		Optional

## MOUNTING DIMENSIONS

