



Industrial & Electrical Components

# Relay Socket


Part No.

PYF08A-E2  
PYF14A-E2

## PYF08A-E2




## OUTLINE DIMENSIONS

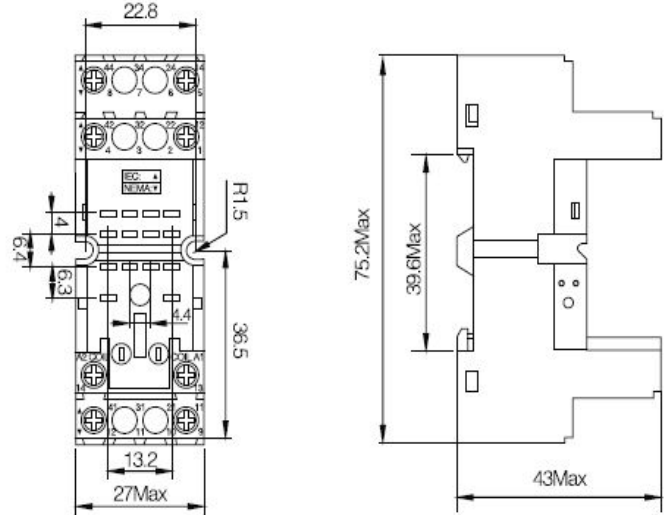

## SPECIFICATION

Rated Load	Current	7A
	Voltage	300V
Dielectric Strength		2500V
Ambient Temperature		-40~+75°C
Socket Material		Flame retardance PA46-S250F6(V0)
Contacts Spring Material		QSn6.5-0.1
Clamp Spring Material		Steel
Module		Optional


## DIAGRAM

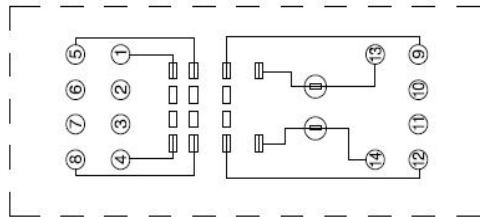

## PYF14A-E2



## OUTLINE DIMENSIONS

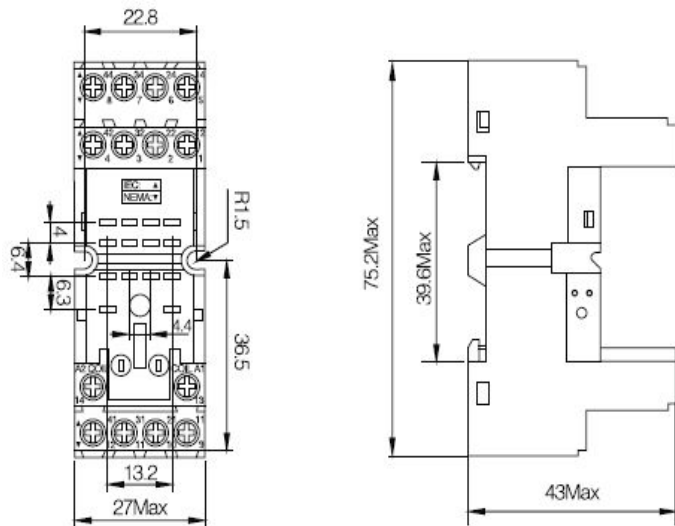

## SPECIFICATION

Rated Load	Current	7A
	Voltage	300V
Dielectric Strength		2500V
Ambient Temperature		-40~+75°C
Socket Material		Flame retardance PA46-S250F6(V0)
Contacts Spring Material		QSn6.5-0.1
Clamp Spring Material		Steel
Module		Optional

## DIAGRAM

