

# NHN-TPC16

Power Distribution Module  
电源分配模块



## 产品特点 FEATURES

- 本端子台专为直流控制电路设计；把一路直流输入转为带开关控制及自恢复保险丝的8路输出；
- 端子台装有8路；自恢复保险可作过流及短路保护用，8路开关可分开控制每路的断开和闭合；
- 带有电源显示LED，以及自恢复保险过流及短路警示LED；
- 配电总电源引出端子，可级联下一个本端子台，使配电更整洁、方便。
- This terminal block is designed for direct current control circuit; transfer one direct current to with switch control and insure 8 output;
- This terminal block has 8 ways insurance and it can use for short current production, 8 ways switch and can control each OFF and ON;
- With LED, fuze and short circuit LED;
- There is a main power fetch out terminal, and can connect with the next terminal block. Make the wiring more tidy and convenient.

## 注意事项 Note

本端子台专为低压设计，请勿接入大于36V的电源。  
The terminal station designed for low pressure, do not access power above 36V.


剥线长度: 6mm 1mm<sup>2</sup> Following /AWG16



## 适合压着端子 SUITABLE FOR TERMINALS

名称 Name	实物图 Physical diagram	尺寸图 Size diagram
叉型裸端子 Forked Bare Terminal		
圆形裸端子 Needle Bare Terminal		

## 外形尺寸图 DIMENSIONS

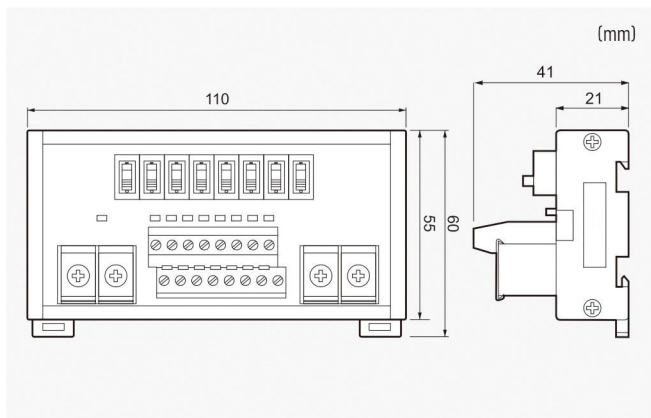

## 规格参数 SPECIFICATIONS

• 输入 Input	输入电流 Input current	16A
	输入电压 Input voltage	DC24V
	每路输出电流 Each one has output current	2A
	输入侧对应 Corresponding input Devices	Into the line side AC power supply
• 输出侧对应 Corresponding output Devices		Load-side AC power supply

## 接线图 WIRING DIAGRAM

