

NHN-TTA08

8 Bit Transition Terminal Block
8位转换端子台



适合电线 SUITABLE WIRE


剥线长度: 6mm 1.5mm² Following /AWG16



适用PLC SUITABLE PLC

KEYENCE	KV-B16XA/XC	KV series of small PLC
	FPO-C16T/C16CT(IN)	FPO-C16T/C16CT(OUT)
	FPO-C16P/C16CP(IN)	FPO-C16P/C16CP(OUT)
	FPO-C32T/C32CT/T32CT(IN)	FPO-C32T/C32CT/T32CT(OUT)
	FPO-C32P/C32CP/T32CP(IN)	FPO-C32P/C32CP/T32CP(OUT)
Panasonic	FPO-E16T/P(IN)	FPO-E16T/P(OUT)
	FPO-E32T/P(IN)	FPO-E32T/P(OUT)
	FPO-EBX	FPO-EBYT
	FPO-E16X	FPO-E16YT
	FPΣ-C28(IN)	FPΣ-C28(OUT)
	FPΣ-C32(IN)	FPΣ-C32(OUT)

外形尺寸图 DIMENSIONS

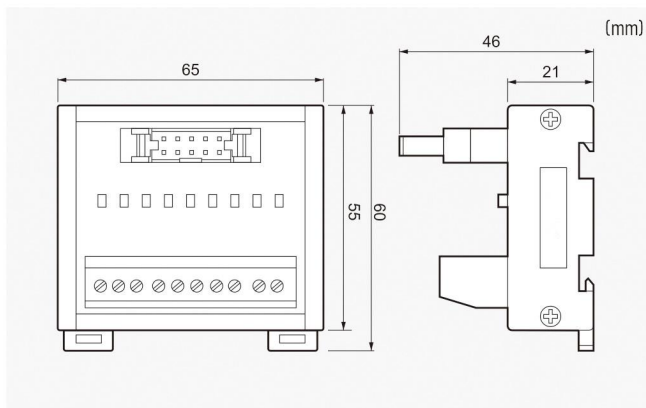

产品特点 FEATURES

- 此款均采用10P连接器一一对应10P端子台，不分输入/输出，可双向连接使用；
- 转接板主要作转接使用，配合本公司本系列其它产品，完全实现高效率省配线的连接；
- The model both use 10P MIL connectors to corresponding to 10P terminal block, which can be used in two-way connecting regardless input and output.
- Interface panel is used to transfer and help to march other products to realize high-effective wiring connection.

注意事项 Note

- 订购前请确认好PLC引脚定义，选择适合的端子台。
- 和PLC连接时，请勿必使用本公司开发的与之对应的专用电缆线。
- Before ordering, please confirm the PLC pin definition, choose the suitable terminal.
- When PLC connection, please be sure to use the company developed and the corresponding special cable.

关联产品 RELATED PRODUCTS

适用电缆 Suitable cable	X200-1 X210-1 X216-1 X216-2 X216-3
---------------------	---------------------------------------

选型参考 TYPE SELECTION REFERENCE

型号 Model	NHN-TTA08
名称 Name	8位转换端子台 8 Bit Transition Terminal Block

规格参数 SPECIFICATIONS

输入 INPUT	
• 额定电流 Nominal operating current	1A
• 额定电压 Nominal coil voltage	DC 24V
输出侧对应 Corresponding output Devices	
	Button Switch, Photoelectric Switch, Solenoid, Indicator, Stepping Servo motor, etc.

接线图 WIRING DIAGRAM

